

Содержание

Диодные мосты	3
Результаты моделирование	3
MB10F	3

Диодные мосты

MB10F	1000V	0.5A (0.8A)	MBF (SOP4)	MBF 7.0 MAX. 3.7 ± 0.2 0.7 ± 0.2 2.5 ± 0.2 1.5 ± 0.2 0.65 ± 0.15 4.7 ± 0.2 0.25 ± 0.1 0.2 1.5 ± 0.2 0.9 ± 0.2 link	
MB4S	400V	0.5A (0.8A)	MBS (TO-26)	MBS (TO-269AA) Mounting Pad Layout 0.029 (0.74) 0.017 (0.43) 0.161 (4.10) 0.144 (3.65) 0.272 (6.90) 0.252 (6.40) 0.105 (2.67) 0.095 (2.41) 0.195 (4.95) 0.179 (4.55) 0 to 8" 0.205 (5.21) 0.195 (4.95) 0.049 (1.24) 0.039 (0.99) 0.062 (1.57) 0.058 (1.47) 0.114 (2.90) 0.094 (2.40) 0.106 (2.70) 0.090 (2.30) 0.0075 (0.19) 0.0065 (0.16) 0.038 (0.96) 0.019 (0.48) 0.008 (0.20) 0.004 (0.10) 0.114 (2.90) 0.110 (2.83) 0.014 (0.36) 0.058 (1.47) 0.054 (1.37) 0.023 MIN. (0.58 MIN.) 0.030 MIN. (0.76 MIN.) 0.105 (2.67) 0.095 (2.41) 0.272 MAX. (6.91 MAX.) link	
MB6S	600V	0.5A (0.8A)	MBS (TO-26)	MBS (TO-269AA) Mounting Pad Layout 0.029 (0.74) 0.017 (0.43) 0.161 (4.10) 0.144 (3.65) 0.272 (6.90) 0.252 (6.40) 0.105 (2.67) 0.095 (2.41) 0.195 (4.95) 0.179 (4.55) 0 to 8" 0.205 (5.21) 0.195 (4.95) 0.049 (1.24) 0.039 (0.99) 0.062 (1.57) 0.058 (1.47) 0.114 (2.90) 0.094 (2.40) 0.106 (2.70) 0.090 (2.30) 0.0075 (0.19) 0.0065 (0.16) 0.038 (0.96) 0.019 (0.48) 0.008 (0.20) 0.004 (0.10) 0.114 (2.90) 0.110 (2.83) 0.014 (0.36) 0.058 (1.47) 0.054 (1.37) 0.023 MIN. (0.58 MIN.) 0.030 MIN. (0.76 MIN.) 0.105 (2.67) 0.095 (2.41) 0.272 MAX. (6.91 MAX.) link	

Результаты моделирование

MB10F



Схема?

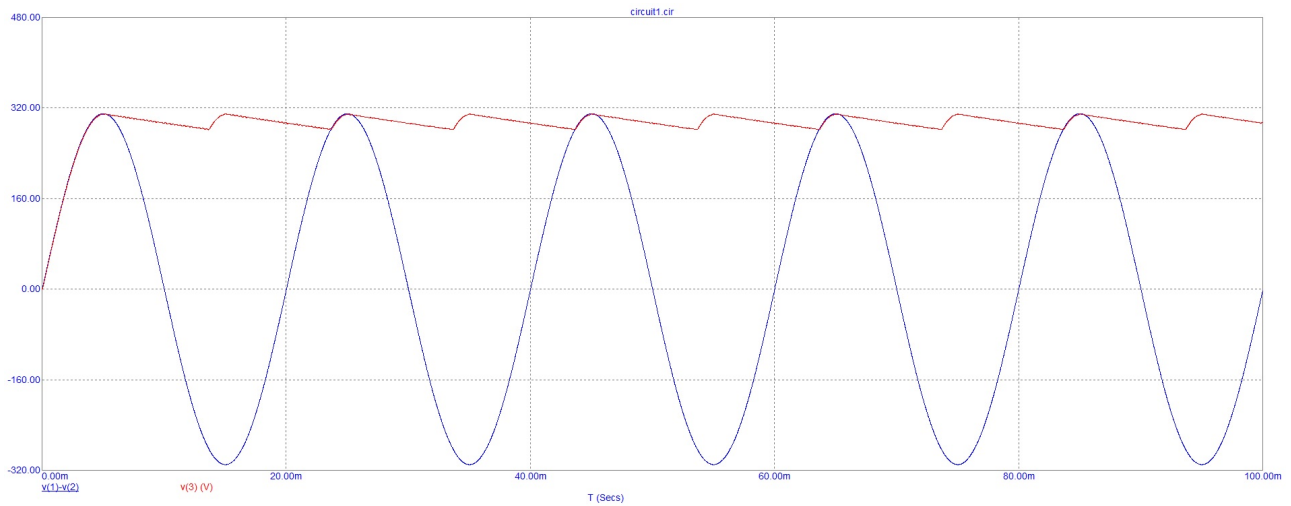


Схема моделирования диодного моста с р-фильтром (4.7 мкФ, 1 мГн)